
Togal areas		
Footprint 1		18,650 SF
Net area 4		17,677 SF
Gross area 3		8,792 SF
Gross Internal Area... 2		8,246 SF
Togal lines		
Wall centerline	163	1,160 FT
Wall Perimeter	10	1,532 FT
Togal counts		
Parking Lot 3		3 EA

CONTINUOUS FOOTING (WF) SCHEDULE

901–03



FOR CONSTRUCTION ABOVE FOOTING, SEE DETAILS.
LONGITUDINAL REINFORCING. EQUAL SPACING U.N.O.
TRANSVERSE REINFORCING

NOTE: 1. FOR DEPTH OF FOOTING, SEE G.S.N. U.N.O.
2. CENTER FOOTING ON CONSTRUCTION ABOVE U.N.O.
3. EXTEND FOOTINGS 12" BEYOND JAMBS U.N.O.

MARK	DIMENSIONS		FOOTING REINFORCING	REMARKS
	HEIGHT	WIDTH		
WF1	12"	3'–0"	4 – #5 CONTINUOUS AND #4 AT 12" O.C. TRANSVERSE	---

SEE S5.3 FOR FOUNDATION PLAN NOTES:

1 – #5 CENTERED IN SOLID GROUTED CELL SPACED AT 24" O.C.– TYPICAL 16'–0" WALL. ALL WALLS TO BE SOLID GROUTED.

1 – #5 CENTERED IN SOLID GROUTED CELL SPACED AT 24" O.C.– TYPICAL 8'–0" WALL. ALL WALLS TO BE SOLID GROUTED.

4" CONCRETE SLAB WITH #3 BARS AT 16" O.C. EACH WAY OVER 2" CLEAR SAND OVER 8 MIL, PUC VAPOR BARRIER – TYP U.N.O.


CONCRETE COLUMN WITH 5 – #8 VERTICAL REINFORCING WITH #3 TIES AT 8" O.C. TYPICAL.
MIN DIA=16"
MAX DIA=40"
SEE ARCH'L FOR COLUMN PROFILE.

SHADED AREA INDICATES DEPRESSED 4" CONCRETE SLAB WITH #3 BARS AT 16" O.C. EACH WAY OVER 2" CLEAR SAND OVER 8 MIL, PUC VAPOR BARRIER – TYP U.N.O.

Took this weird piece as a part of the wall lines/perimeter

ISOLATED FOOTING (F) SCHEDULE

901–11

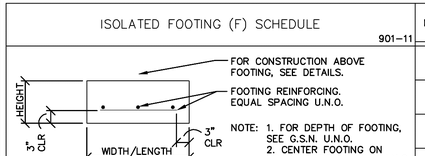

FOR CONSTRUCTION ABOVE FOOTING, SEE DETAILS.
FOOTING REINFORCING. EQUAL SPACING U.N.O.

NOTE: 1. FOR DEPTH OF FOOTING, SEE G.S.N. U.N.O.
2. CENTER FOOTING ON CONSTRUCTION ABOVE U.N.O.

MARK	DIMENSIONS			FOOTING REINFORCING	HAIRPIN
	HEIGHT	WIDTH	LENGTH		
F1	12"	3'–0"	3'–0"	4 #5 EACH WAY	1 #6
F2	12"	4'–0"	4'–0"	5 #5 EACH WAY	1 #7
F3	12"	5'–0"	5'–0"	7 #5 EACH WAY	1 #8
F4	18"	7'–6"	7'–6"	9 #6 EACH WAY	1 #8

FOUNDATION PLAN

SCALE: 1/8" = 1'–0"

FINAL SUBMITTAL

REVISIONS				
SYMBOL	DESCRIPTION	DATE	PREP. BY	APPROVED

SATISFACTORY TO: DATE
FAC MANG. OFFICER: DATE
DIRECTOR OF ENG.: DATE
SW DIV FOR COMMANDER NAVFAC DATE

SUBMITTED:
DESIGN:
DRAWN:
CHECKED:
DM:
AFT LEADER
FP:

DEPARTMENT OF THE NAVY NAVAL FACILITIES ENGINEERING COMMAND
SAN DIEGO SOUTHWEST DIVISION NAVAL FACILITIES CALIFORNIA

P–491 YOUTH CENTER
MARINE CORPS AIR STATION
YUMA, ARIZONA

FOUNDATION PLAN

SIZE D
IF SHEET IS LESS THAN 22" X 34" IT IS A REDUCED PRINT– SCALE REDUCED ACCORDINGLY

PWO. NO.

PROJECT LOCATION
YUMA, ARIZONA
CONSTR. CONTRACT NO.
N68711–02–C–2018
SPEC.
NAVFAC DRAWING NO.
8175782
SHEET 49 OF
S2.1